


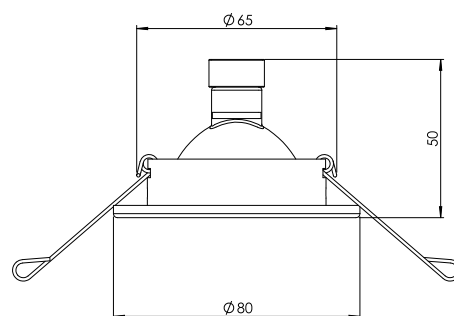

## 84.139.82

|                           |                         |
|---------------------------|-------------------------|
| <b>Surface:</b>           | Stainless steel dull 82 |
| <b>Lamp socket:</b>       | for 1 x GU5,3 / 12 V    |
| <b>Diameter:</b>          | 80 mm                   |
| <b>Weight:</b>            | 0,1 kg                  |
| <b>Voltage:</b>           | 12 V                    |
| <b>Protection class:</b>  | III                     |
| <b>Safety norm:</b>       | CE                      |
| <b>EEC-Light sources:</b> | A++ - C                 |

recessed luminaire stainless steel dull  
for 1 x GU5,3 MR16 12 V LED lamp  
or 1 x GX5,3 QR-CBC51 12 V/max. 50 w  
adjustable light source